


光学特性データ

測定サンプル | ルミフレックス130(LF)

STD. WHITE=	11.505
PG(H)=	1.30
α (H)R=	40.00
α (H)L=	40.00
β (H)R=	60.00
β (H)L=	60.00

(α) = 半値角(ピークゲインの1/2の値)
 (β) = 1/3値角(ピークゲインの1/3の値)

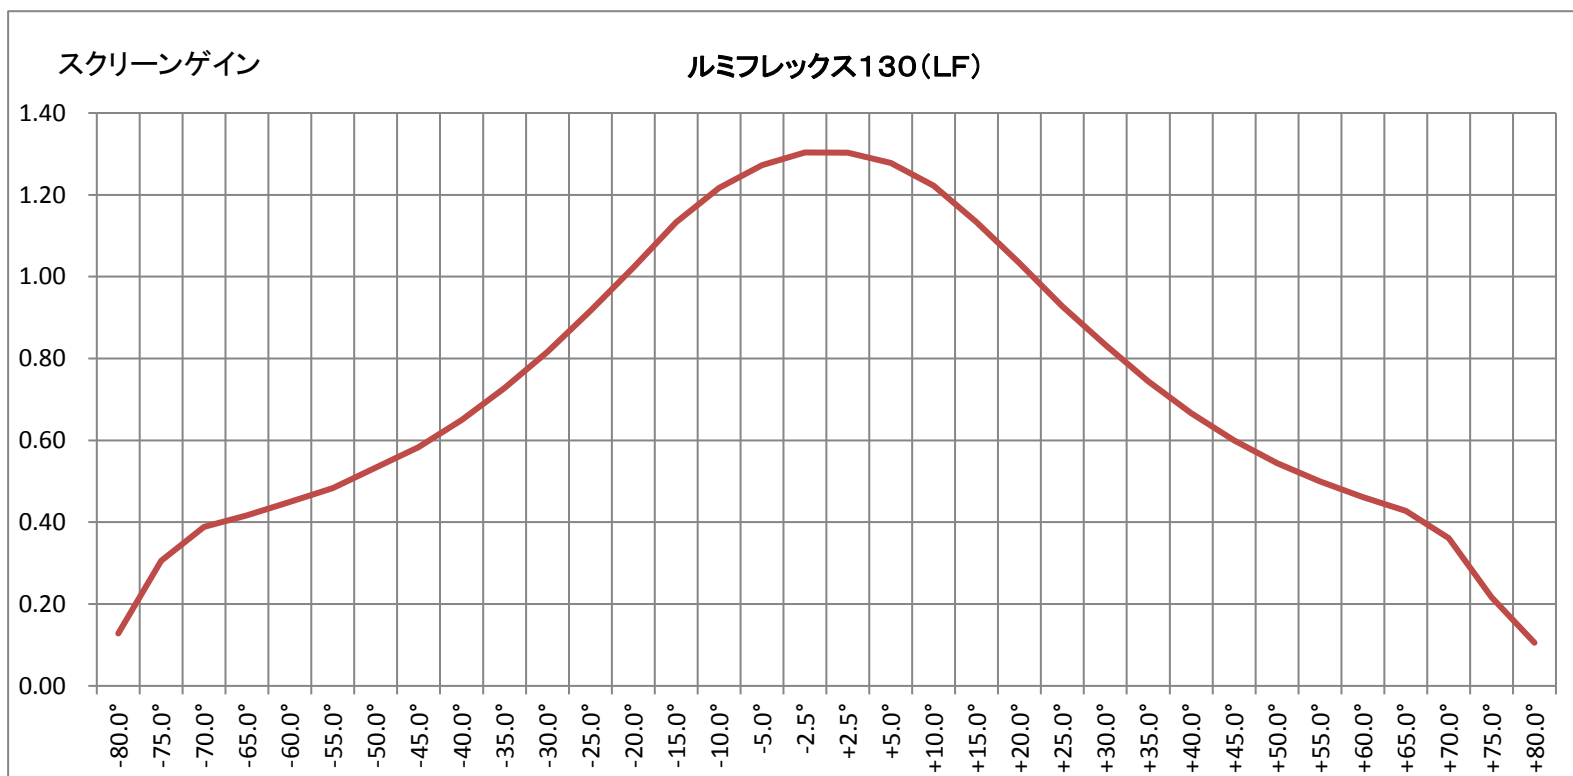

HORIZONTAL		
角度	nt	Gs
-80.0°	1.47	0.13
-75.0°	3.516	0.31
-70.0°	4.474	0.39
-65.0°	4.794	0.42
-60.0°	5.177	0.45
-55.0°	5.561	0.48
-50.0°	6.136	0.53
-45.0°	6.711	0.58
-40.0°	7.478	0.65
-35.0°	8.373	0.73
-30.0°	9.396	0.82
-25.0°	10.547	0.92
-20.0°	11.761	1.02
-15.0°	13.039	1.13
-10.0°	13.998	1.22
-5.0°	14.637	1.27
-2.5°	14.997	1.30
+2.5°	14.987	1.30
+5.0°	14.701	1.28
+10.0°	14.062	1.22
+15.0°	13.039	1.13
+20.0°	11.889	1.03
+25.0°	10.674	0.93
+30.0°	9.588	0.83
+35.0°	8.565	0.74
+40.0°	7.67	0.67
+45.0°	6.903	0.60
+50.0°	6.264	0.54
+55.0°	5.753	0.50
+60.0°	5.305	0.46
+65.0°	4.922	0.43
+70.0°	4.155	0.36
+75.0°	2.493	0.22
+80.0°	1.214	0.11