


# 光学特性データ

測定サンプル | ルミプレックス130(LP)

STD. WHITE =	11.505
PG(H) =	1.30
$\alpha$ (H)R =	40.00
$\alpha$ (H)L =	40.00
$\beta$ (H)R =	55.00
$\beta$ (H)L =	55.00

( $\alpha$ ) = 半値角(ピークゲインの1/2の値)  
 ( $\beta$ ) = 1/3値角(ピークゲインの1/3の値)

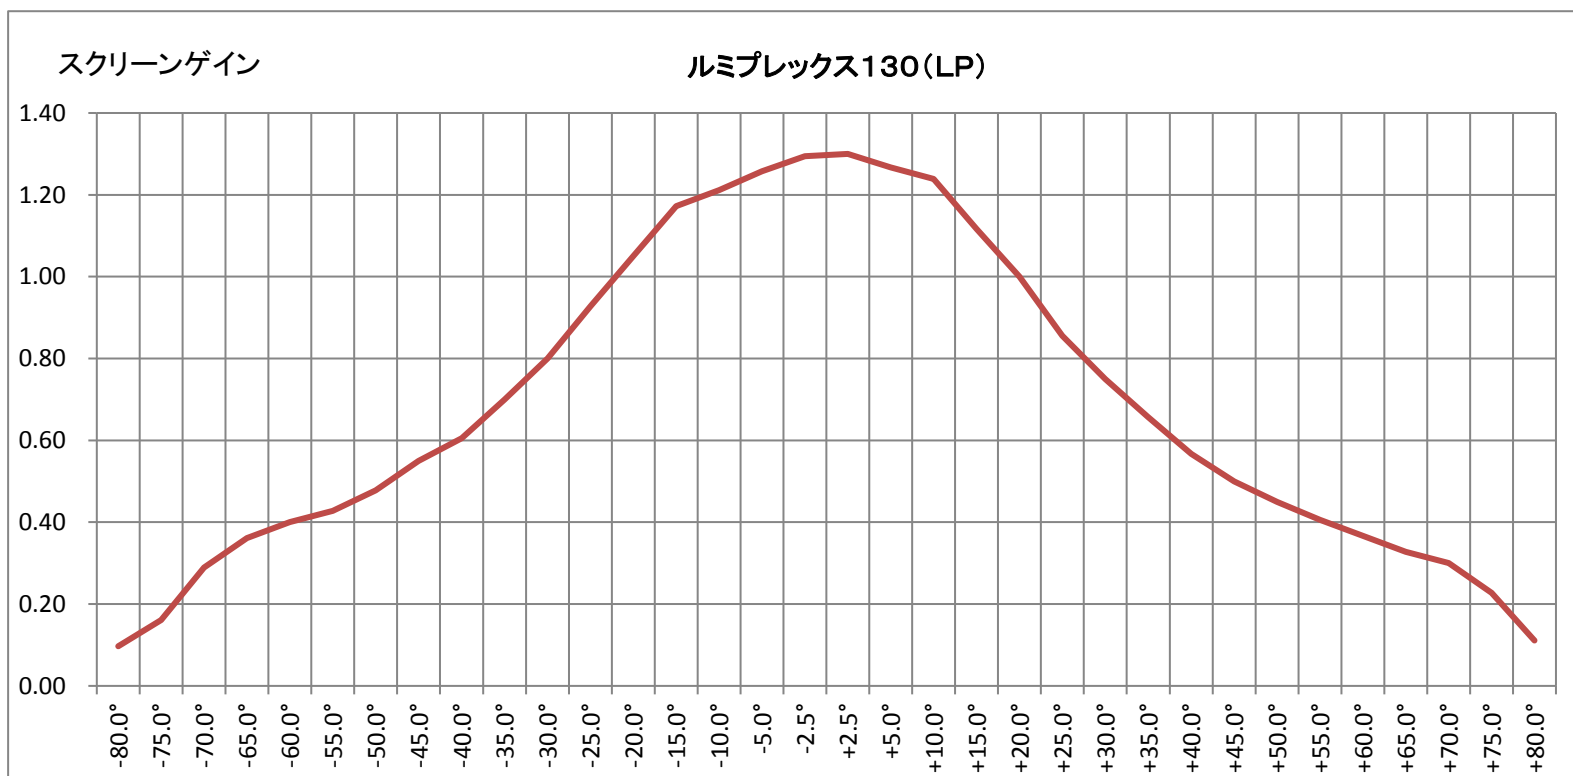

HORIZONTAL		
角度	nt	Gs
-80.0°	1.115	0.10
-75.0°	1.854	0.16
-70.0°	3.324	0.29
-65.0°	4.155	0.36
-60.0°	4.602	0.40
-55.0°	4.922	0.43
-50.0°	5.497	0.48
-45.0°	6.328	0.55
-40.0°	6.967	0.61
-35.0°	8.054	0.70
-30.0°	9.204	0.80
-25.0°	10.674	0.93
-20.0°	12.081	1.05
-15.0°	13.487	1.17
-10.0°	13.934	1.21
-5.0°	14.466	1.26
-2.5°	14.893	1.29
+2.5°	14.957	1.30
+5.0°	14.573	1.27
+10.0°	14.254	1.24
+15.0°	12.848	1.12
+20.0°	11.505	1.00
+25.0°	9.843	0.86
+30.0°	8.629	0.75
+35.0°	7.562	0.66
+40.0°	6.520	0.57
+45.0°	5.753	0.50
+50.0°	5.177	0.45
+55.0°	4.666	0.41
+60.0°	4.219	0.37
+65.0°	3.771	0.33
+70.0°	3.452	0.30
+75.0°	2.621	0.23
+80.0°	1.278	0.11