


# 光学特性データ

測定サンプル | プロフライト(PF10)

STD. WHITE=	11.505
PG(H)=	1.00
$\alpha$ (H)R=	50.00
$\alpha$ (H)L=	50.00
$\beta$ (H)R=	70.00
$\beta$ (H)L=	70.00

( $\alpha$ ) = 半値角(ピークゲインの1/2の値)  
 ( $\beta$ ) = 1/3値角(ピークゲインの1/3の値)

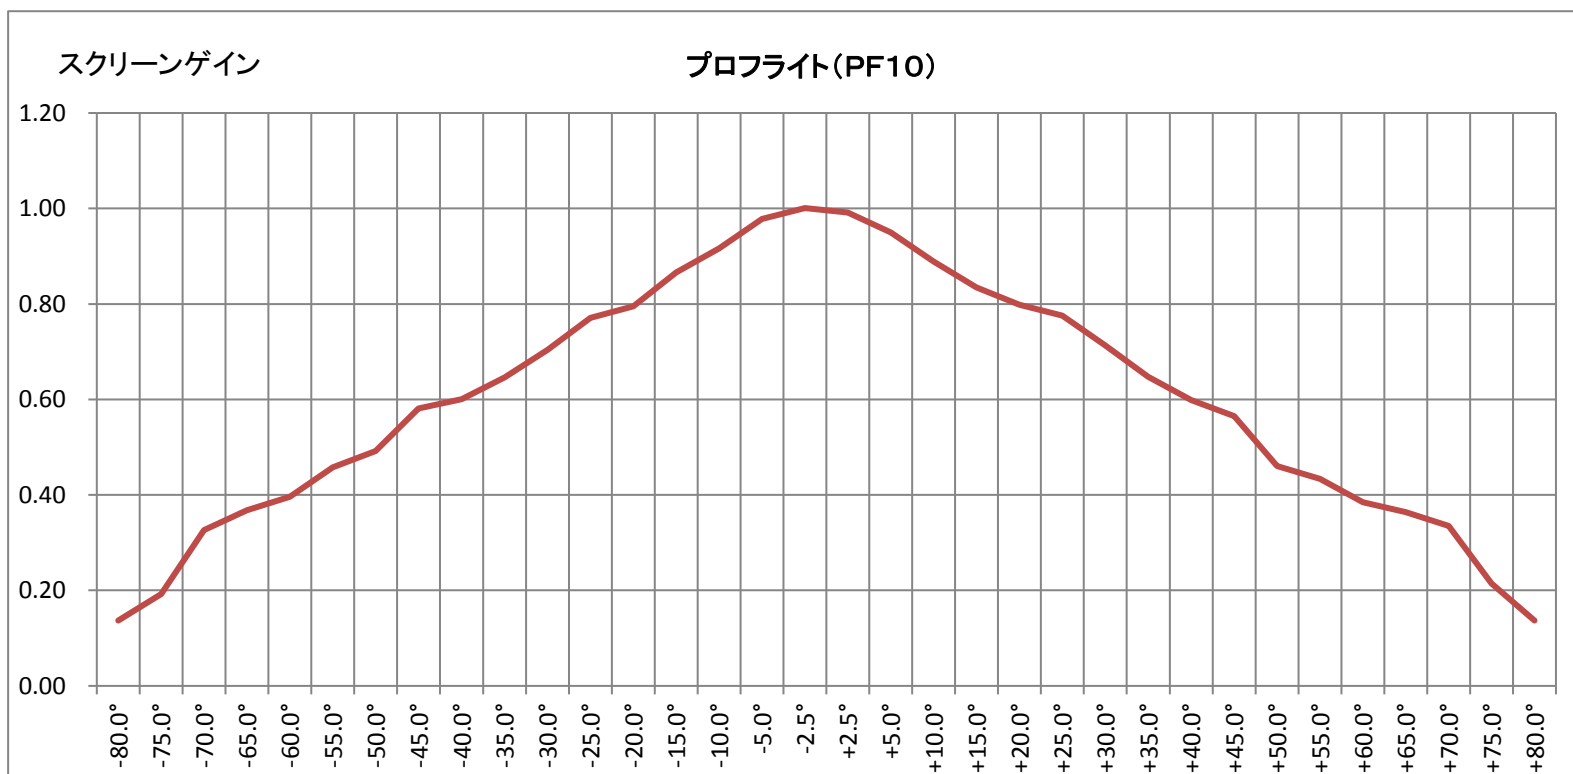

HORIZONTAL		
角度	nt	Gs
-80.0°	1.575	0.14
-75.0°	2.214	0.19
-70.0°	3.752	0.33
-65.0°	4.237	0.37
-60.0°	4.557	0.40
-55.0°	5.265	0.46
-50.0°	5.662	0.49
-45.0°	6.687	0.58
-40.0°	6.91	0.60
-35.0°	7.431	0.65
-30.0°	8.1	0.70
-25.0°	8.869	0.77
-20.0°	9.145	0.79
-15.0°	9.967	0.87
-10.0°	10.547	0.92
-5.0°	11.25	0.98
-2.5°	11.515	1.00
+2.5°	11.405	0.99
+5.0°	10.93	0.95
+10.0°	10.227	0.89
+15.0°	9.599	0.83
+20.0°	9.188	0.80
+25.0°	8.922	0.78
+30.0°	8.205	0.71
+35.0°	7.4498	0.65
+40.0°	6.89	0.60
+45.0°	6.501	0.57
+50.0°	5.299	0.46
+55.0°	4.989	0.43
+60.0°	4.429	0.38
+65.0°	4.189	0.36
+70.0°	3.854	0.33
+75.0°	2.47	0.21
+80.0°	1.575	0.14